



BERLIN ALTERNATIVE ENERGY INDUSTRY

Renewable Energy Solutions

El Kilo Circle, Mecca Str. 136, 3rd. Floor, Amman-Jordan www.baeindustry.com

SOLAR MODULES

mono-crystalline solar modules with maximum power of **(265 Wp)** are produced using the state-of-the-art (Automated) robotic production lines. These modules are suitable to be used for most electrical power applications and have excellent durability to prevailing weather conditions

FEATURES

- Optimum maximum conversion efficiency.
- Positive Power tolerance up to 3% extra output.
- High Transparency - low iron tempered solar glass increase energy yield.
- Produced Under systematic quality control covering all processes and check points.
- Fast and Easy Installation.
- Anodized Aluminum Frame for better corrosion resistance.
- Excellent wide variety of solar output modules.

BENEFITS


- Outstanding technical Support.
- After Sales-Service.
- 10 Years on material and workmanship Warranty.
- 25 Years Linear Performance Warranty.
- Marketing Support to Official Distributors.
- Customized mounting solutions.

APPLICATIONS

- On-grid residential roof-tops
- On-grid commercial/ industrial roof-tops
- Solar Power plants
- Off-grid systems




Linear Performance Warranty

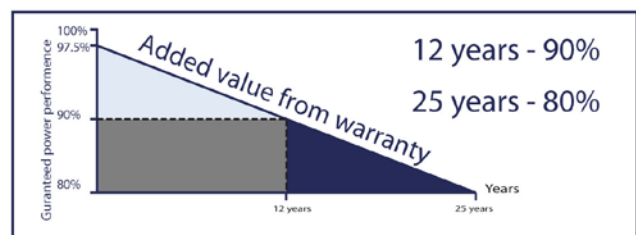

[El kilo circle, Mecca St. Blg 136, 3rd floor, office 303, P.O.BOX: 830701 - 11183 Amman , Jordan](http://ElkiloCircle,MeccaSt.Blg136,3rdfloor,office303,P.O.BOX:830701-11183Amman,Jordan)

www.baeindustry.com LdH@baeindustry.com dk@baeindustry.com

+962-6-548 10 90, +962-6-548 10 93, 962-7973 93 999 +962-797176176



BERLIN ALTERNATIVE ENERGY INDUSTRY

Renewable Energy Solutions

El Kilo Circle, Mecca Str. 136, 3rd. Floor, Amman-Jordan www.baeindustry.com

Product PS-M60(Black)

MONO-CRYSTALLINE MODULE
(240/245/250/255/260/265)w

Mechanical Characteristics

MODULE COMPONENTS	VALUES
Solar Cells per Module	60 (6 x 10) in series
Cell Type	Grade "A" - Mono-crystalline silicon, 156 x 156 mm ²
Front Surface	Low Iron Tempered 3.2mm Solar Glass
Encapsulant	Fastcure EVA
Back Cover	Backsheet
Frame Material	Anodized / Frame With I Beam Support
Connection	IP65 Junction Box
Number of diodes	3 Bypass diodes
Output Cables	Solar Cable with MC4 interconnection

Temperature Characteristics

	UNIT	VALUES
Voc Temperature Coefficient	%/C°	-0.36
Isc Temperature Coefficient	%/C°	0.02
Power Temperature Coefficient	%/C°	-0.48
Operating Module Temperature	C°	-40 To +85
NOCT	C°	46
Fire Classification		C

* Temperature coefficient may vary $\pm 5\%$

Electrical Characteristics


STC	Units	240w	245w	250w	255w	260w	265w
Maximum System Voltage	Vdc	1000	1000	1000	1000	1000	1000
Open Circuit Voltage (Voc)	Voc	37.24	37.4	37.72	38	38.2	38.32
Short Circuit Current (Isc)	Isc	8.23	8.39	8.87	8.95	9.05	9.15
Rated voltage @ maximum power	Vmpp	29.86	29.96	30.31	30.44	30.59	30.71
Rated current @ maximum power	Impp	8.04	8.18	8.25	8.38	8.5	8.63
Rated Maximum Power @ STC	PMAX	240	245	250	255	260	265
Maximum Series Fuse	[A]	15	15	15	15	15	15
Module Efficient [%]	η'	14.64	14.95	15.25	15.56	15.86	16.17

STC: Irradiance 1000 w/m², AM : 1.5, T_C: 25 C°

WARRANTY	VALUES
Power Output	12 Years 90% of Minimum Power Output 25 Years 80% of Minimum Power Output
Product	10 Years

PACKAGING	VALUES	
Container Capacity	20 Feet 264 Panels /(300) 40 Feet 616 Panels /(700)	Each Pallet contains 22 (25) Modules


PV Module

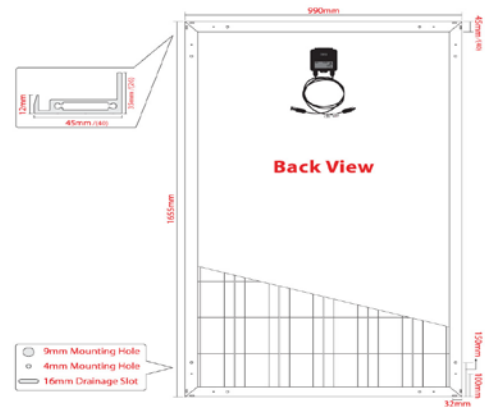

● TWO FRAME HEIGHT OPTIONS: 40mm / 45mm

DIMENSIONS and WEIGHT	VALUES
Dimensions [mm]	1655 x 990 x 45 or (40)
Weight [kg]	~ 19.8
Pallet Dimensions [mm]	1698 x 1138 x 1090

IV - CURVE

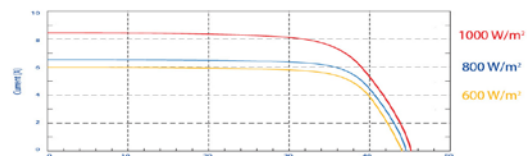

El kilo circle, Mecca St. Blg 136, 3rd floor, office 303, P.O.BOX: 830701 - 11183 Amman, Jordan
www.baeindustry.com LdH@baeindustry.com dk@baeindustry.com

+962-6-548 10 90, +962-6-548 10 93, 962-7973 93 999 +962-797176176